

Liagò

LIVING STORAGE UNITS

2020

Piero Lissoni



Description

Ideal for the dining and living areas, the Liagò collection consists of two low storage units with doors and drawers and a tall storage unit with hinged or flap doors. Defined by clear lines and increased thicknesses, these units are inspired by the Venetian architectural element (an outdoor loggia made of wood, often featuring a marble floor) after which they have been named. Just like a building, the 50mm-thick frame of the units hides a functional soul: side and back panels are assembled by means of a "folding" mechanism to create an internal compartment, allowing the passage of electrical cables and other elements. This means that the units can accommodate power supply cables and connections for televisions, monitors, lamps, speakers and other wired devices. Whether placed directly on the floor or raised on steel feet, the Liagò storage units are available in different woods and lacquered in numerous glossy and satin shades, with the marble option for the tops. The interiors are covered with a silky, anti-scratch, anti-fingerprint, matt anthracite material, while the shelves are made of smoked etched glass. The project also includes drawers with an incredibly thin frame and accessories such as pull-out trays in grey Canaletto walnut, guaranteeing additional customisation and versatility. Liagò can be equipped with an internal lighting system and one for the high storage unit's open compartment. This solution underscores the exceptional elegance of the interiors and allows the objects contained therein to be displayed at best.

Technical information

Außengestell (Seitenwände, Rückwand und Basis)

Panel aus MDF Holzfaser furniert

Tür und Schubladenfront

Panel aus MDF Holzfaser furniert oder Marmor (Ausführung natur matt oder Ausführung natur glänzend)

Untergestell

Stahlprofile

Füße

Kunststoff

Fachboden

Glas

Ausziehbare Tablett und Besteckablage

MDF Holzfaser furniert

Innenschublade

Unterseite und Rückwand aus Spanholz mit Bezug melaminbeschichtet, Kanten aus Aluminium mit Vollauszug und gedämpfter Führungen

LED-Innenbeleuchtung


Strip LED 24V DC 3000K

- Netzteil: Eingangsspannung 110-240V 50-60Hz, Ausgangsspannung 12-24V DC, Höchstleistung 18W-48W


- Schalter mit Präsenzsensor und elektronischem Netzteil: Spannung 110-240V 50-60Hz

Technical drawings


LG250_1

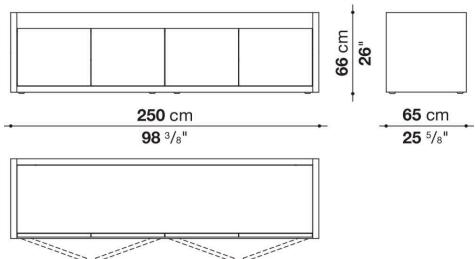


LGB250_1

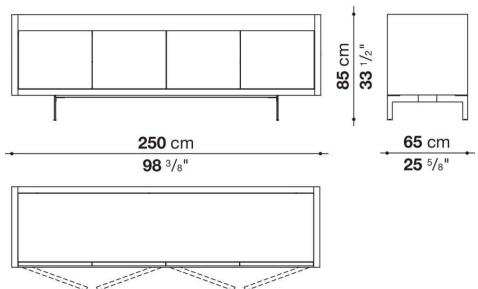


LG250_2

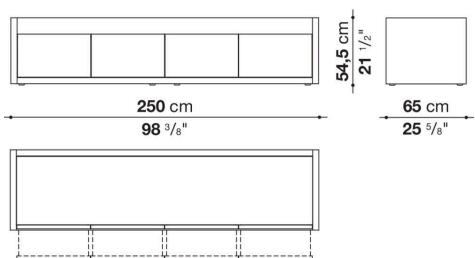


LGB250_2

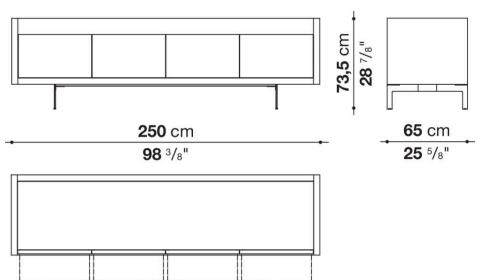


LG250_3

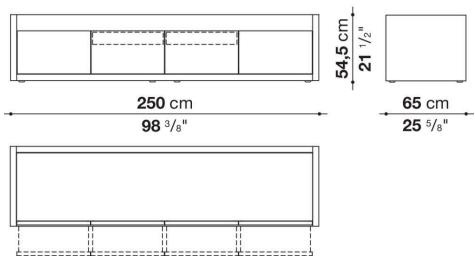

LGB250_3

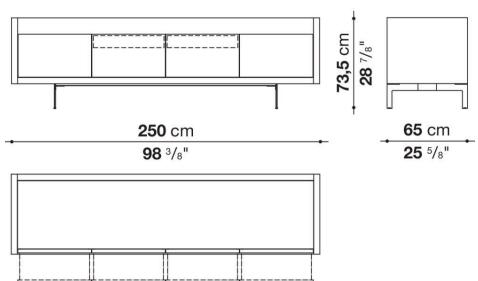

LG250_4

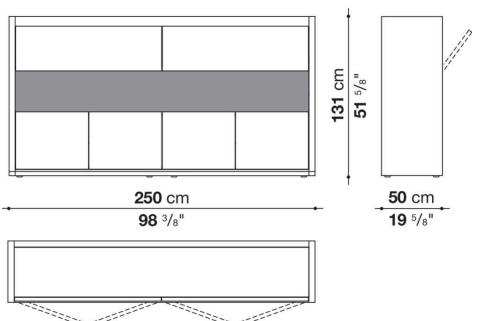

LGB250_4

